


Pogled srijeda




Einschraubtiefe max. 6mm
screw-in-depth max. 6mm
dubina uvrtanja max. 6mm



Zeichengenehmigung
approvals
Oznake i odorenja

Achse in AUS-Stellung (0°)
 axle in OFF-position (0°)
 Osovina u položaju isključeno (0°)

Pogled straga

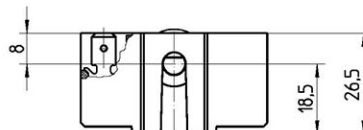

Schema spoja



Technische Angaben:


- Flachstecker DIN 46244 A 6,3-0,8
- Abweichung der Achsfläche in AUS-Stellung max. $\pm 3^\circ$
- Genehmigte technische Daten siehe Zeichnungsnummer 46.00000.001

technical data:

- plug DIN 46244 A 6,3-0,8
- divergence of axle area in OFF-position max. $\pm 3^\circ$
- approved technical data see type drawing 46.00000.001

Tehnicki podaci:

- Plasnati priključak DIN 46244 A 6,3-0,8
- Odstupanje ravnine osovine
u položaju isključeno max. $\pm 3^\circ$
- Odobreni tehnički podaci
vidi crtez 46.00000.001



Achsprofil
axle profile
Profil osovine

		This document is exclusively committed to you for the agreed purpose. Any kind of duplication, utilization or communication of its content is prohibited, if not expressly consented otherwise. Violators are committed to pay compensations. Any claims of existing or future property rights remain unaffected.		Blank No. EN Mat.No.		Scale mm	
				Material		Scale 1:1	
				Surface Texture ISO 1302 general: Tolerances DIN 7168-g			
				Designation			
				EGO Geräteschalter			
				EGO multi function switch			
				EGO Okrelna sklopka			
3 CD0001		2010-12-15					
2 F02914		2010-02-20	CAD	Date	Name		
1 ER4210		1992-09-11	Create	1992-09-11	SOMMER		
Chs Information No.		Date	Proc.	2010-02-16	MAURERR		
F.Rel.			Rel.	2010-02-20	BELZB		
				Drawing No.		Sh.No.	Ver.
				46.25866.510		901	1 F
Origin		Repl./or Zchg. v. 3.6.80		Replby		Sheets	Doc.
						Ex.Doc.	