


|                   |                                  |         |                    |              |                |
|-------------------|----------------------------------|---------|--------------------|--------------|----------------|
| ambient air temp. | -30 ~ +120°C                     |         | internal clearance | radial       | 3 - 18 μm (CN) |
| tolerance class   | P0 DIN620                        |         |                    | axial        | normal         |
| noise/vibration   | Z1                               |         | basic load rating  | dynamic - Cr | 4,76 kN        |
| seal              | 2RS low-friction                 |         |                    | static - Cor | 2,7 kN         |
| bearing marking   | COM-A                            |         | ring hardness      | inner        | 62 ± 3 HRC     |
| grease filling    | Quantity                         | 30 - 35 |                    | outer        | 62 ± 3 HRC     |
|                   | Greatwall Shangbo Low Temp. No.2 |         | ball hardness      |              | 64,5 ± 2,5 HRC |

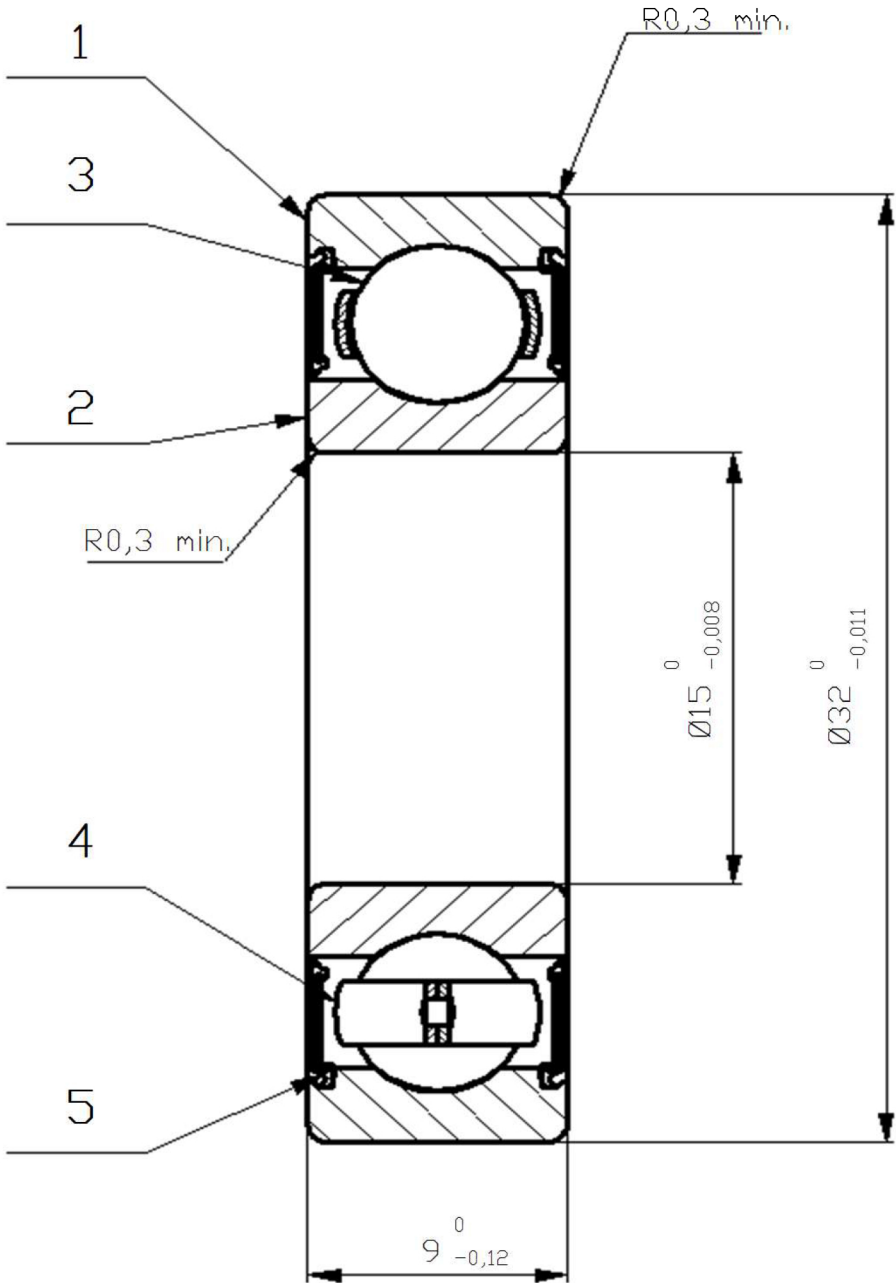

| 5   | 2   | seal           | NBR+SPCC       | color: black |
|-----|-----|----------------|----------------|--------------|
| 4   | 1   | riveted cage   | SPCC           |              |
| 3   | 9   | ball (Ø 4,763) | 100Cr6 / GCr15 |              |
| 2   | 1   | inner ring     | 100Cr6 / GCr15 |              |
| 1   | 1   | outer ring     | 100Cr6 / GCr15 |              |
| Pos | Qty | Item name      | Material       | Remarks      |