


ambient air temp.	-30 ~ +120°C		internal clearance	radial	5 - 20 μm (CN)
tolerance class	P0 DIN620			axial	normal
noise/vibration	Z1		basic load rating	dynamic - Cr	22,96 kN
seal	2RS low-friction			static - Cor	13,6 kN
bearing marking	COM-A		ring hardness	inner	62 ± 3 HRC
grease filling	Quantity	30 - 35		outer	62 ± 3 HRC
	Greatwall Shangbo Low Temp. Grease No.2			ball hardness	64,5 ± 2,5 HRC

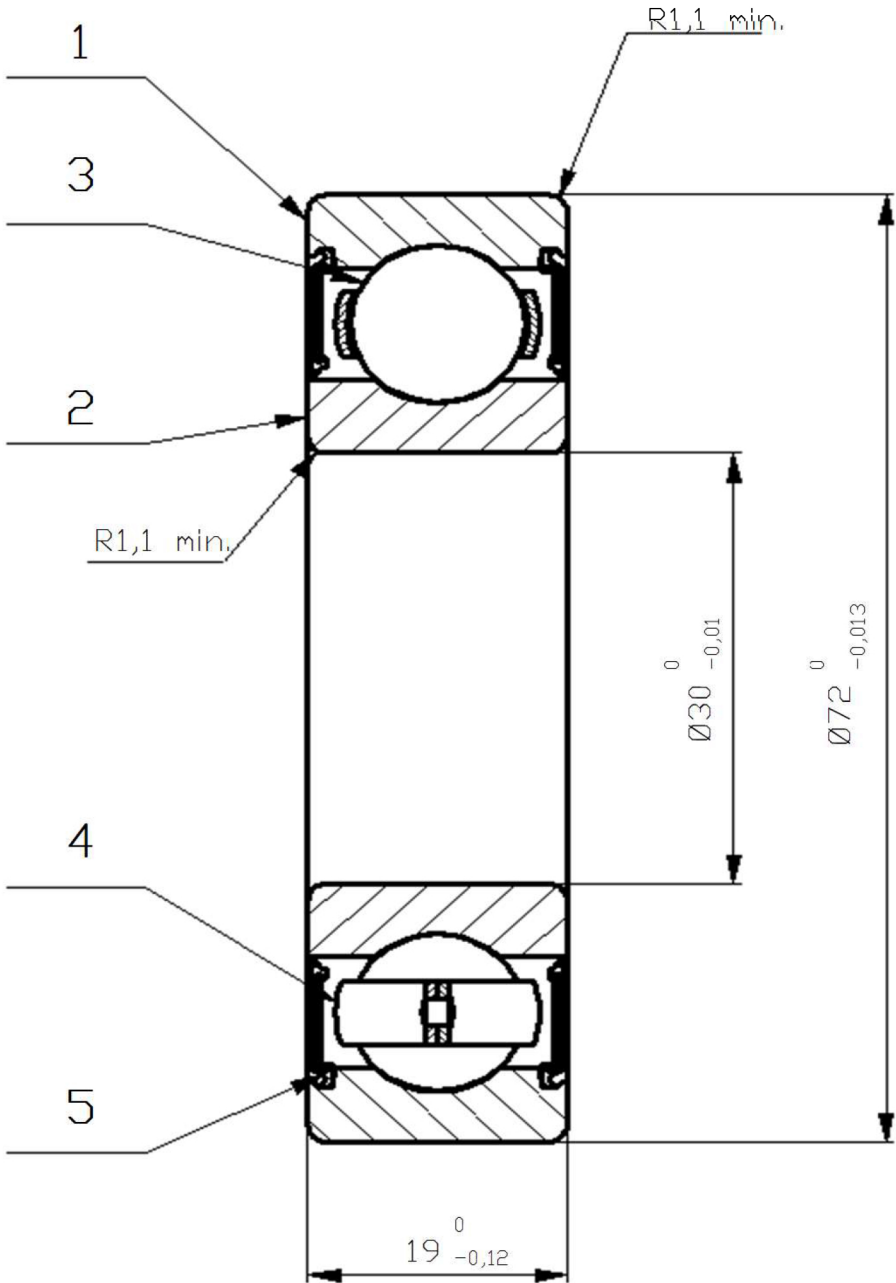

5	2	seal	NBR+SPCC	color: black
4	1	riveted cage	SPCC	
3	8	ball (Ø 12)	100Cr6 / GCr15	
2	1	inner ring	100Cr6 / GCr15	
1	1	outer ring	100Cr6 / GCr15	
Pos	Qty	Item name	Material	Remarks